

Application Success Stories

AGSUN

Ningbo Agsun Products Inc,




Complicated Inside
Structure
内部结构复杂

No Touch Up
无补喷

Even Layer
Thickness
膜厚均匀

Application Success Stories

Layout

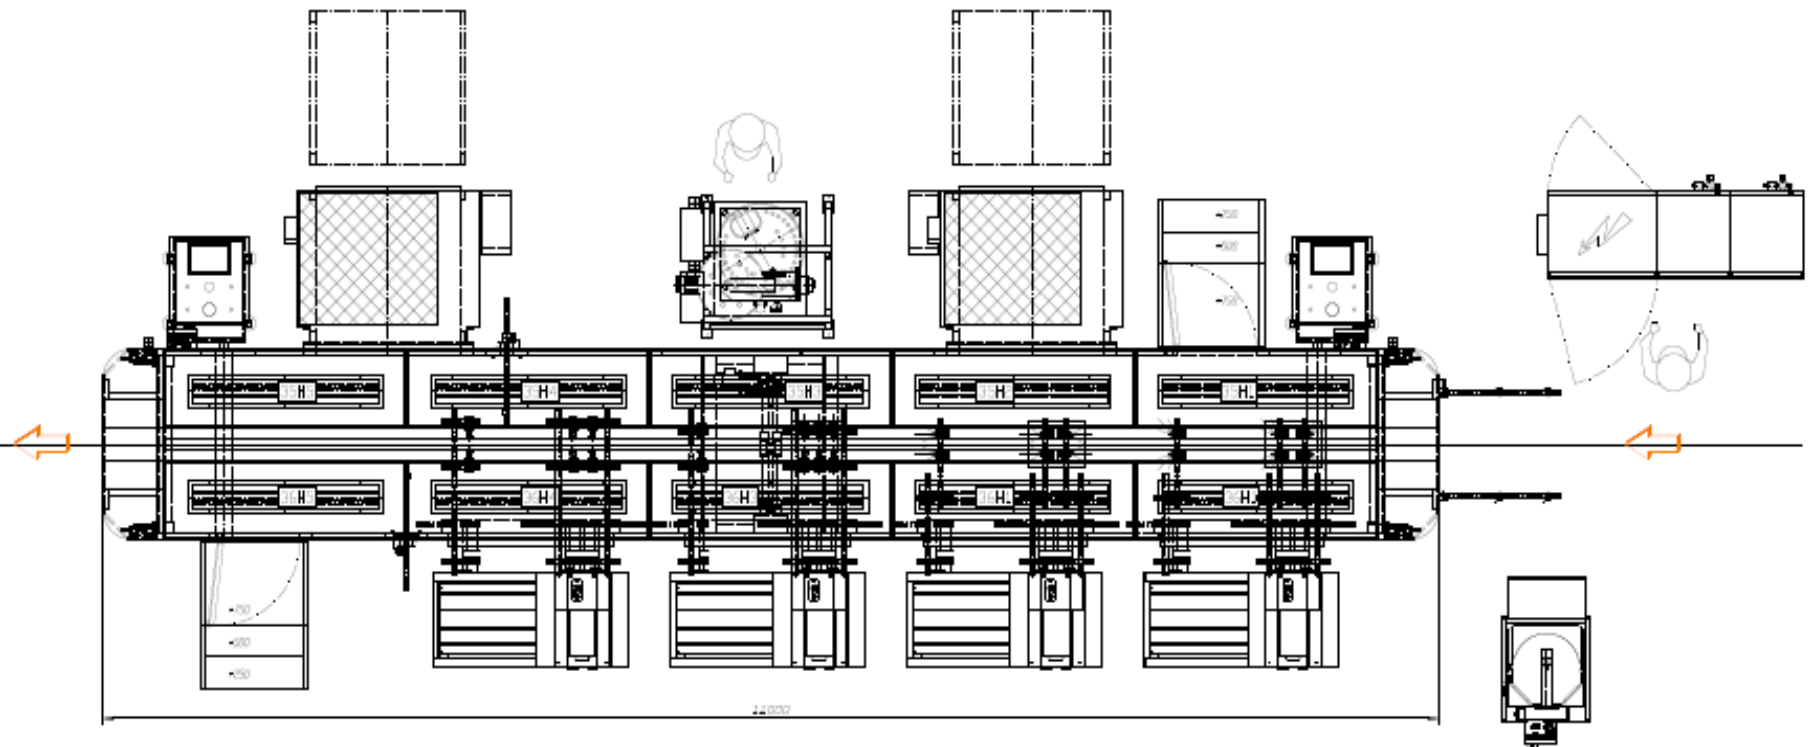

Application Success Stories

Installation Key Data

Parts:	Oven Cavityed
Parts Size:	H 430 mm (in steps of 3mm)
	W 350 mm
Line Speed:	up to 2.5 m/min
Description:	
	1 x MRS FE / 2 X 6,600 m ³ / h
	1 x OptiFlex A2– 18
	18 x OptiGun GA02-E1
	4 x ZA05-13
	1 x MagicControl CM-30
	1 X FPS 11-2
	1 x Manual Coating System
	2 x Optiflex2-B
Installation:	2013



Application Success Stories



With barbecue
plate groove

- Agsun: First brand of oven in China
- Powder: Colobia, Tometec (taiwan brand)
- Layer requirement: 100-180u, all inside layer thickness must in this tolerance
- Four stations: 1st station: 4 corners
2nd station: Front and back
3rd station: left and right
4th station: top
5th station: outside

